



TopDek™ Post-Top is Kenall's new single pole mount luminaire. Complimentary in appearance and function to TopDek, the fixture provides unprecedented glare control in an energy efficient, long life LED lamp source. It is appropriately scaled for applications such as parking garages, surface lots and area lighting.

### Additional Product Details


#### TopDek Post-Top (TPDPT) Series

- Lumen output ranging from 6,500-34,000 lm
- 100W, 160W, 216W, 300W and 408W
- 4000K, 5000K and 5700K
- Type II, III, IV, V-Narrow Round, and V-Wide Square distributions
- Textured acrylic or polycarbonate tertiary lens; flat lens for full cutoff or drop lens for unprecedented glare control
- Die-cast, marine-grade aluminum housing
- Internal house-side shield for lower wind loading and better aesthetics
- Easy access to driver boards through top of housing
- IP65 rating per IEC 60598
- 10-year limited product warranty



#### Dual Optic System

TopDek Post-Top's 90° field-rotatable, dual optic system offers enhanced flexibility in light distribution.

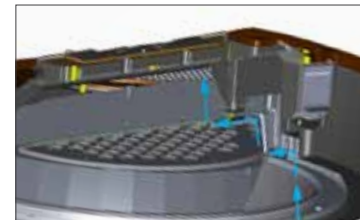

#### Thermal Management

Thermal management path conducts heat away from the LED system through the top of the housing.



#### Optional Sensor

TopDek Post-Top offers an integrated control system which is removed from the heat source, sensing motion and daylight at the individual luminaire level.



#### Full-Cutoff Distribution

Textured acrylic or polycarbonate tertiary flat lens for full-cutoff applications; emitting no uplight while also minimizing glare and high angle light.



flat lens only